



# AUC HEAVY CULTIVATOR - TRAILED

# NEW!

A - machine base	B1 - mandatory equipment	C - options
front cage roller 400 mm	hitch spindle cat.3 type "I", cat.3 type "I", cat. 4 type "U", cat. 3 and 4 type "U"	
road wheels 500/50 R17	<b>B2 - mandatory equipment</b>	
two rows of spring tines 25x25 mm with duckfoot four rows or of spring tines 32x12 mm with a straight coulter	mechanical	
iclearing bar II (for the version with 25 x 25 teeth)	<b>B3 - mandatory equipment</b>	
side screens	Single crosskill roller Ø 400mm	
	Double crosskill roller Ø 400mm	Lights with fenders for trailed



Set of 4 tractor trace cultivators with spring

### D1 - additional front levelling bar




front flat levelling bar regulated mechanically



front harrow hydraulically adjustable with 80x10mm springs


### D2 - additional rear levelling bar

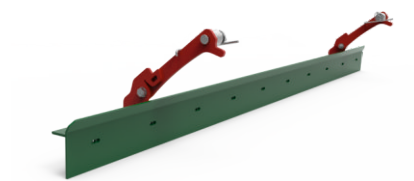

levelling bar behind crosskill roller



cage roller Ø 320mm behind crosskill roller

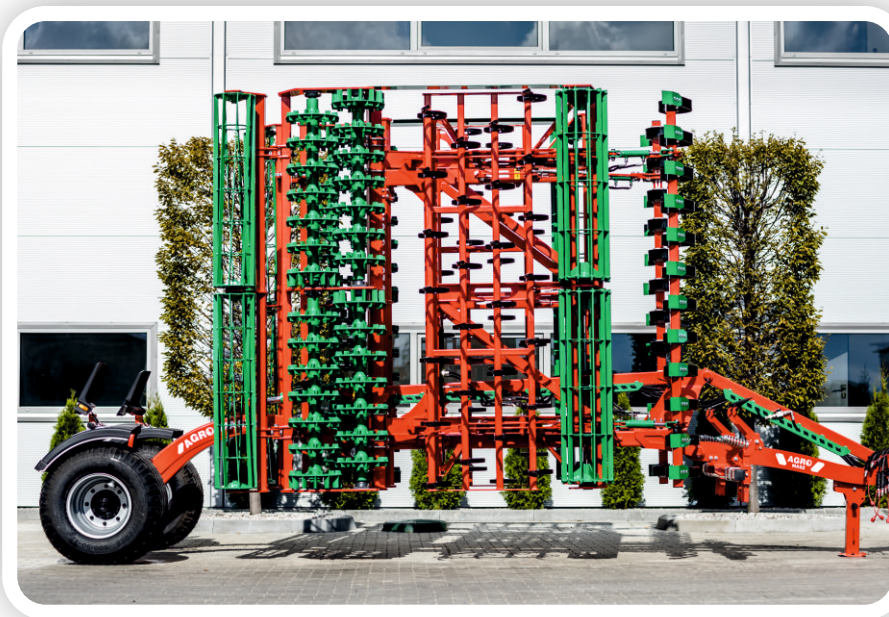

Model	Working width (m)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
AUC40H	4.0	4150	140 - 190	16 / 36	2.6 - 3.8	18
AUC50H	5.0	4700	175 - 225	20 / 44	3.0 - 4.5	
AUC60H	6.0	5200	210 - 260	24 / 52	3.6 - 5.4	

\*\* The weight of the machine depends of the equipment